



Phenolic black casters

Designed for smooth concrete
Can be used for storage loads

- Needle bearing
- Highly resistant to oil, grease, gasoline and mild acids
- Not recommended for wet applications
- Temperature range: -40°C to +120°C



Swivel

Rigid

Swivel caster with brake

Swivel caster

Product code	Wheel size in	Wheel size mm	Bolt hole pattern	Plate size	Plate mm	Fork mm	Height mm	Hole center mm	Core	Wheel size	Load capacity lbs
CRO0400S	4"	100	2-5/8" x 3"	114 x 97	5,75	5,75	142	66.7 x 75	PP	100 x 50	550
CRO0500S	5"	125	2-5/8" x 3"	114 x 97	5,75	5,75	165	66.7 x 76.2	PP	125 x 50	700
CRO0600S	6"	150	2-5/8" x 3"	114 x 97	5,75	5,75	190	66.7 x 76.2	PP	150 x 50	800
CRO0800S	8"	200	2-5/8" x 3"	114 x 97	5,75	5,75	241	66.7 x 76.2	PP	200 x 50	900

Rigid caster

Product code	Wheel size in	Wheel size mm	Bolt hole pattern	Plate size	Plate mm	Fork mm	Height mm	Hole center mm	Core	Wheel size	Load capacity lbs
CRO0400R	4"	100	2-5/8" x 3"	114 x 97	5,75	5,75	142	66.7 x 76.2	PP	100 x 50	550
CRO0500R	5"	125	2-5/8" x 3"	114 x 97	5,75	5,75	165	66.7 x 76.2	PP	125 x 50	700
CRO0600R	6"	150	2-5/8" x 3"	114 x 97	5,75	5,75	190	66.7 x 76.2	PP	150 x 50	800
CRO0800R	8"	200	2-5/8" x 3"	114 x 97	5,75	5,75	241	66.7 x 76.2	PP	200 x 50	900

Swivel caster with brake

Product code	Wheel size in	Wheel size mm	Bolt hole pattern	Plate size	Plate mm	Fork mm	Height mm	Hole center mm	Core	Wheel size	Load capacity lbs
CRO0402S	4"	100	2-5/8" x 3"	114 x 97	5,75	5,75	142	66.7 x 76.2	PP	100 x 50	550
CRO0502S	5"	125	2-5/8" x 3"	114 x 97	5,75	5,75	165	66.7 x 76.2	PP	125 x 50	700
CRO0602S	6"	150	2-5/8" x 3"	114 x 97	5,75	5,75	190	66.7 x 76.2	PP	150 x 50	800
CRO0802S	8"	200	2-5/8" x 3"	114 x 97	5,75	5,75	241	66.7 x 76.2	PP	200 x 50	900

Contact your distributor:



CROMSON
CASTERS FOR ROLLING DEVICES
Swivel, rigid and swivel with brake






Blue elastic rubber casters

Perform well on all types of surfaces

- Needle bearing
- Temperature range: -20°c to +70°c
- Non -marking wheels

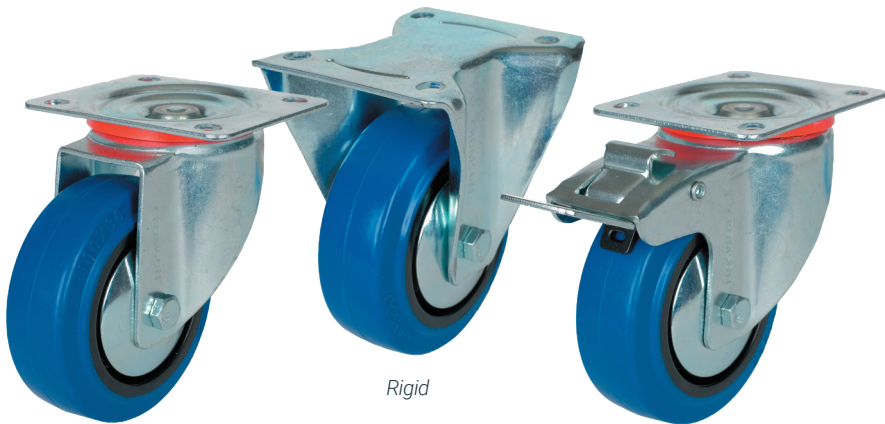

Swivel

Rigid

Swivel caster with brake

Swivel caster

Product code	Wheel size in	Wheel size mm	Bolt hole pattern	Plate size	Plate mm	Fork mm	Height mm	Hole center mm	Core	Wheel size	Load capacity lbs
CRO10300S	3"	80	3-1/8" x 2-5/16"	102 x 82	3	2,5	105	80 x 60	PU	80 x 36	220
CRO10400S	4"	100	3-1/8" x 2-5/16"	102 x 82	3	2,5	128	80 x 60	PU	100 x 36	286
CRO10500S	5"	125	3-1/8" x 2-5/16"	102 x 82	3	2,5	155	80 x 60	PU	125 x 38	396
CRO10600S	6"	160	4"x 3 1/4"	135 x 110	4	3	195	110 x 80	PU	160 x 50	550

Rigid caster

Product code	Wheel size in	Wheel size mm	Bolt hole pattern	Plate size	Plate mm	Fork mm	Height mm	Hole center mm	Core	Wheel size	Load capacity lbs
CRO10300R	3"	80	3-1/8" x 2-5/16"	102 x 82	3	2,5	105	80 x 60	PU	80 x 36	220
CRO10400R	4"	100	3-1/8" x 2-5/16"	102 x 82	3	2,5	128	80 x 60	PU	100 x 36	286
CRO10500R	5"	125	3-1/8" x 2-5/16"	102 x 82	3	2,5	155	80 x 60	PU	125 x 38	396
CRO10600R	6"	160	4"x 3 1/4"	135 x 110	4	3	195	110 x 80	PU	160 x 50	550

Swivel caster with brake

Product code	Wheel size in	Wheel size mm	Bolt hole pattern	Plate size	Plate mm	Fork mm	Height mm	Hole center mm	Core	Wheel size	Load capacity lbs
CRO10302S	3"	80	3-1/8" x 2-5/16"	102 x 82	3	2,5	105	80 x 60	PU	80 x 36	220
CRO10402S	4"	100	3-1/8" x 2-5/16"	102 x 82	3	2,5	128	80 x 60	PU	100 x 36	286
CRO10502S	5"	125	3-1/8" x 2-5/16"	102 x 82	3	2,5	155	80 x 60	PU	125 x 38	396
CRO10602S	6"	160	4"x 3 1/4"	135 x 110	4	3	195	110 x 80	PU	160 x 50	550

Non-marking tread

PP: Polypropylene | PU: Polyurethane



Orange polyurethane casters

Suitable for heavier applications

- Precision ball bearings (Double ball)
- Temperature range: -20°c to +70°c
- Resistant to most cleaners and moisture



Swivel

Rigid

Swivel caster with brake

Swivel caster

Product code	Wheel size in	Wheel size mm	Bolt hole pattern	Plate size	Plate mm	Fork mm	Height mm	Hole center mm	Core	Wheel size	Load capacity lbs
CRO30400S	3"	100	3-5/16" x 2-13/16"	115 x 100	6	5	105	85 x 72	PP	100 x 50	330
CRO30500S	4"	125	3-5/16" x 2-13/16"	115 x 100	6	5	128	85 x 72	PP	125 x 50	485
CRO30600S	5"	150	3-5/16" x 2-13/16"	115 x 100	6	5	155	85 x 72	PP	150 x 50	660
CRO30800S	6"	200	3-5/16" x 2-13/16"	115 x 100	6	5	195	85 x 72	PP	200 x 50	838

Rigid caster

Product code	Wheel size in	Wheel size mm	Bolt hole pattern	Plate size	Plate mm	Fork mm	Height mm	Hole center mm	Core	Wheel size	Load capacity lbs
CRO30400R	3"	100	3-5/16" x 2-13/16"	115 x 100	6	5	105	85 x 72	PP	100 x 50	330
CRO30500R	4"	125	3-5/16" x 2-13/16"	115 x 100	6	5	128	85 x 72	PP	125 x 50	485
CRO30600R	5"	150	3-5/16" x 2-13/16"	115 x 100	6	5	155	85 x 72	PP	150 x 50	660
CRO30800R	6"	200	3-5/16" x 2-13/16"	115 x 100	6	5	195	85 x 72	PP	200 x 50	838

Swivel caster with brake

Product code	Wheel size in	Wheel size mm	Bolt hole pattern	Plate size	Plate mm	Fork mm	Height mm	Hole center mm	Core	Wheel size	Load capacity lbs
CRO30402S	3"	100	3-5/16" x 2-13/16"	115 x 100	6	5	105	85 x 72	PP	100 x 50	330
CRO30502S	4"	125	3-5/16" x 2-13/16"	115 x 100	6	5	128	85 x 72	PP	125 x 50	485
CRO30602S	5"	150	3-5/16" x 2-13/16"	115 x 100	6	5	155	85 x 72	PP	150 x 50	660
CRO30802S	6"	200	3-5/16" x 2-13/16"	115 x 100	6	5	195	85 x 72	PP	200 x 50	838

Excellent combination of strength and durability